

Sani Ceiling




Sanification Ceiling Device

Sanification Ceiling device projected to eliminate airborne pathogens in the air in all closed places till 40 m².

A perception of clean odor-free air is felt when entering in the place where the appliance is installed; the benefit is assured and durable over the time.

Very silent, can be easily ceiling installed
Very low energy consumption; suggested 24 hours ongoing use for a total sanification effect of the room air and the surfaces.
Simple switch on with remote control.

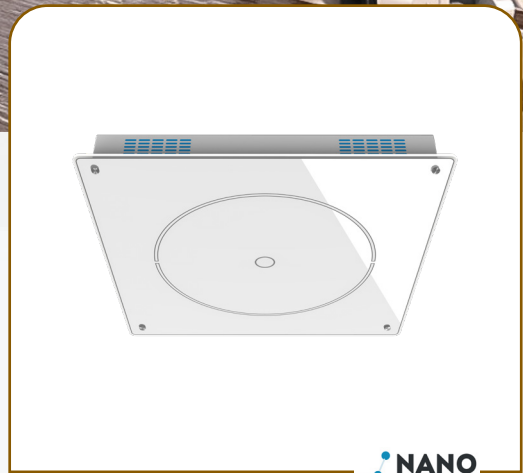

NANO
PROJECT

Applications

Offices, Hospitals, Gyms, Waiting Rooms, Classrooms, Closed Rooms up to 40 m²

Features

Remote Control
Silent
Low energy consumption
Free maintenance

Colours available

white stainless steel


Optional

Central Emergency Light

GENERAL FEATURES

Category	Air Sanitizer
Room (cover m ²)	up to 40
Materials	Painted or Steel structure Satin glass front
Airflow capacity (m ³ /h)	30
Power absorbed (W)	16
Noise (dB)	20
Operating temperature (°C)	0 - 50
Voltage (V)	110 - 240
Frequency (Hz)	50 - 60
N° NTP (non thermal plasma)	1
Led UVC	Yes
Photocatalyst	Yes
Type of inlet filter Type of outlet filter	Polyester long fiber lasting
Montage	Ceiling
Control	Remote control
Dimension (cm)	59,5(P) x 59,5(L) x 7(H)
Weight (Kg)	6,5

Sani Ceiling

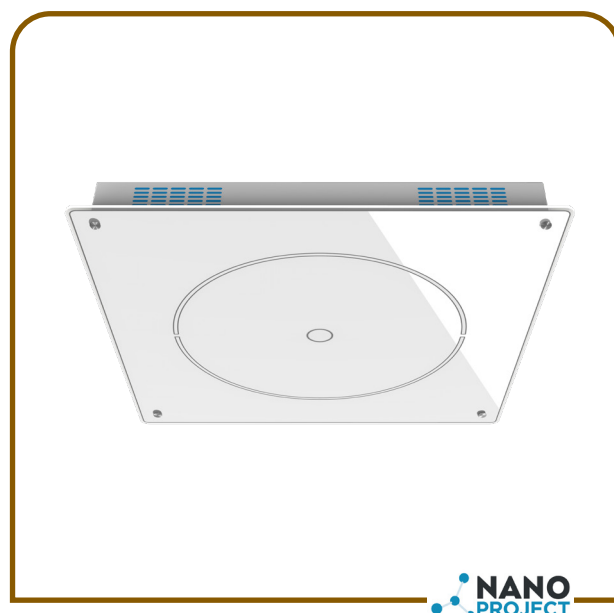

SPECIFIC FEATURES

VENTILATION CHARACTERISTICS

Capacity (m ³ /h)	15
N° fan	2
Speed (rpm)	3200
Pressure (Pa)	17,5
Outlet air	Upper grid

CHARACTERISTICS OF THE LIGHTING SYSTEM

N° Led UVC	8
Wavelength (nm)	265 - 275 nm
Irradiation 3 cm (μW/cm ²)	838
Irradiation 10 cm (μW/cm ²)	206

PACKAGING

External measure (cm)	60,5(P) x 62,5(L) x 8(H)
Total Weight (Kg)	7,5

