

Sani Ceiling Plus



Purification Boosted Ceiling Device


Purification Boosted Ceiling device projected to eliminate airborne pathogens in the air in all closed places till 80 m²

A perception of clean odor-free air is felt when entering in the place where the appliance is installed; the benefit is assured and durable over the time.

Very silent, can be easily ceiling installed.

Very low energy consumption; suggested 24 hours ongoing use for a total purification effect of the room air and the surfaces.

Simple switch on with remote control.

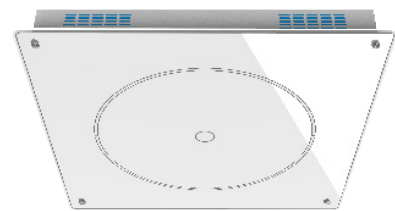

NANO
PROJECT

Applications

Offices, Hospitals, Gyms, Waiting Rooms, Classrooms, Outpatient Clinics
Closed rooms up to 80 m²

Features

Remote control
Silent
Low energy consumption
No maintenance

Colours available

white

Optional

Central Emergency Light

Sani Ceiling Plus

GENERAL FEATURES

Category	Air Purifier
Room (cover m ²)	up to 80
Materials	Painted steel structure Satin glass front
Airflow capacity (m ³ /h)	60
Power absorbed (W)	26
Noise (dB)	20
Operating temperature (°C)	0 - 50
Voltage (V)	110 - 240
Frequency (Hz)	50 - 60
N° NTP (non thermal plasma)	2
Led UVC	Yes
Photocatalyst	Yes
Type of inlet filter Type of outlet filter	Polyester long fiber lasting Polyurethane fiber with activated carbon
Montage	Ceiling
Control	Remote control
Dimension (cm)	65(P) x 65(L) x 11(H)
Weight (Kg)	7,5



SPECIFIC FEATURES

VENTILATION CHARACTERISTICS

Capacity (m ³ /h)	15
N° fan	4
Speed (rpm)	3200
Pressure (Pa)	17,5
Outlet air	Upper grid

CHARACTERISTICS OF THE LIGHTING SYSTEM

N° Led UVC	16
Wavelength (nm)	265 - 275 nm
Irradiation 3 cm (μW/cm ²)	838
Irradiation 10 cm (μW/cm ²)	206

PACKAGING

External measure (cm)	70(P) x 70(L) x 12(H)
Total Weight (Kg)	8,5

