

Sani Pipe 300

Purification Tube Device 300 m³/h for air ducts

Purification Tube Device for installation in the existing air ducts line up to 300 m³/h air flow. The air that crosses internal channel Sani Pipe 300 is fully treated in order to eliminate pathogens.

Device with a very low energy consumption easy to install to the electric power line without any maintenance.

A perception of clean odor-free air is felt when entering in the place where the appliance is installed; the benefit is assured and durable over the time.

Opzional inlet filter.



NANO
PROJECT

Applications

Ducts

Features

Easy installation


Colours available

White

GENERAL FEATURES

Category	Air Purifier
Room (cover m ²)	
Materials	Painted steel structure
Airflow capacity (m ³ /h)	up to 300
Power absorbed (W)	12
Noise (dB)	10
Operating temperature (°C)	0 - 50
Voltage (V)	110 - 240
Frequency (Hz)	50 - 60
N° NTP (non thermal plasma)	1
Led UVC	Yes
Photocatalyst	Yes
Type of inlet filter	
Montage	Canalization
Control	External control
Dimension (cm)	21(P) x 21(L) x 36(H)
Weight (Kg)	1,6

Sani Pipe 300

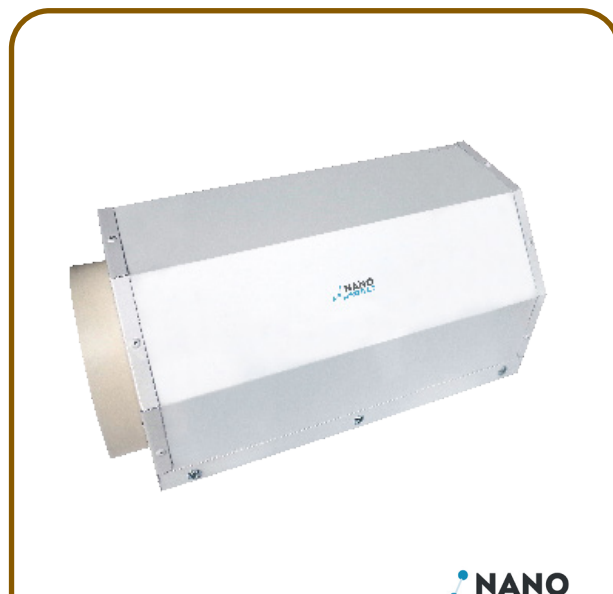

SPECIFIC FEATURES

VENTILATION CHARACTERISTICS

Capacity (m ³ /h)	
N° fan	
Speed (rpm)	
Pressure (Pa)	
Outlet air (Ø mm)	120 - 150

CHARACTERISTICS OF THE LIGHTING SYSTEM

N° Led UVC	8
Wavelength (nm)	265 - 275 nm
Irradiation 3 cm (µW/cm ²)	838
Irradiation 10 cm (µW/cm ²)	206

PACKAGING

External measure (cm)	23(P) x 23(L) x 38(H)
Total Weight (Kg)	2,1

